

Factsheet


Sunshower ONE

Technical Specifications

Session Time Infrared	10 minutes + 5 minutes cooling
IP-Code	IPX 5
Volt/Frequency	230V / 50 Hz
Electrical protection class	I
Temperature Range	10 - 40 °C
Humidity Range	20% - 100% (not suitable for a steam cabin)
Installation options	Build-in / Build-on flat / Build-on corner
Colour options	Black / White / Organic Grey / Sand White
RAL code body	RAL 7038
Installation cable	3 x 2,5mm ²


Sunshower ONE/L

Niche size	H 1769 x W 263 x D 100 mm
Net Weight	Body: 12,1 kg Glasspane: 12,6 kg
Power	3050 W
Lamps	3x IR 1000 W

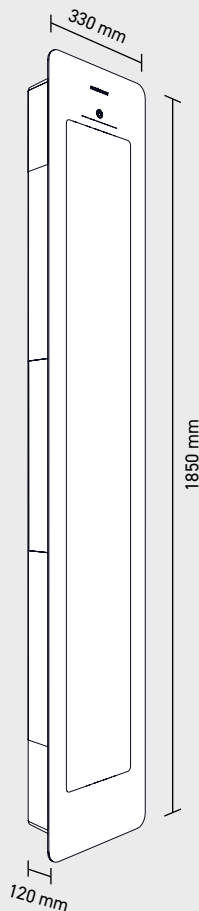

Sunshower ONE/M

Niche size	H 1319 x W 263 x D 100 mm
Net Weight	Body: 10,9 kg Glasspane: 9,3 kg
Power	2050 W
Lamps	2x IR 1000 W

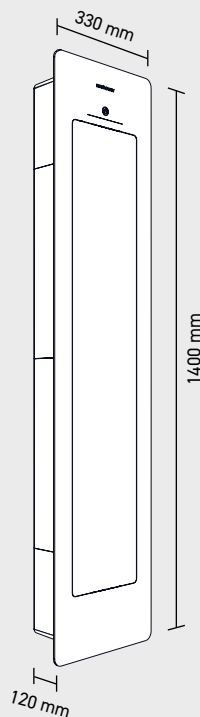

Sunshower ONE/S

Niche size	H 869 x W 263 x D 100 mm
Net Weight	Body: 8,7 kg Glasspane: 6,3 kg
Power	1050 W
Lamps	1x IR 1000 W

